


Pre-Select 5 CCT 4" LED Flush Mount, Square

FDFM-10W-LED-5CCT-120V-D-SQ
SKU#101081

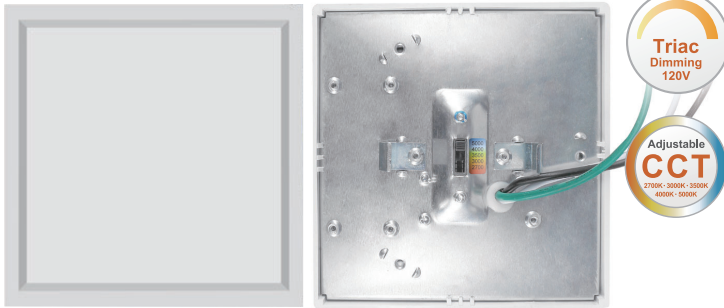

SPECIFICATIONS	
Model	FDFM-10W-LED-5CCT-120V-D-SQ
Watts	10W
CRI	80Ra
Color Temperature(K)	Pre-Select 5 CCT 2700K, 3000K, 3500K, 4000K, 5000K
Light Output(lm)	600lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	120°


Features

- Edge-lit technology, no glare or dark spots, instant-on
- This 5/8" thick luminaire is easy to install on standard J-boxes with a quick snap
- Construction: plastic with white translucent acrylic lens
- Dimming: TRIAC 10% - 100%
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours
- Field selectable 2700K, 3000K, 3500K, 4000K, 5000K

PACKAGE	
Weight.(g)	200g
Qty/CTN (pcs)	20pcs/CTN
Box Dimension	252*248*304mm
Gross Weight	5.3kg/CTN



DIMENSIONS

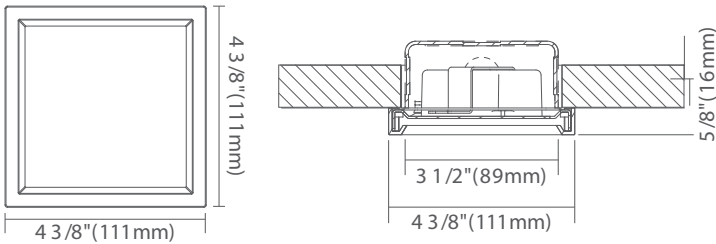

INCLUDED IN BOX

- 4" Square Flush Mount
- Mounting bracket to J-Box
- Two J-box Screws
- Three Wire Nuts

Installation

4" J - Box

Accessories included:
Attach mounting bracket to J-box
Click downlight into mounting bracket

4" Housing

Accessories sold separately
Connect E26 adapter to the LED adapter
Insert mounting clips and push downlight up until flush with ceiling

Accessories (sold sperately)

Used For
4inch-Square

Mounting Bracket for Housing

Mouting Bracket for 4" Housing