

# Pre-Select 5 CCT 6" LED Flush Mount

FDFM-15W-LED-5CCT-120V-D  
SKU#101082



| SPECIFICATIONS       |   |
|----------------------|---|
| Model                | FDFM-15W-LED-5CCT-120V-D                              |
| Watts                | 15W   |
| CRI                  | 80R   |
| Color Temperature(K) | Pre-Select 5 CCT<br>2700K, 3000K, 3500K, 4000K, 5000K |
| Light Output(lm)     | 900lm   |
| Default Driver Input | AC120V, 60Hz  |
| Dimming              | Triac Dimming   |
| Power Factor         | >0.9  |
| Approved Location    | Wet Location  |
| Operating Temp.      | (-4°F~104°F) -20~40°C                                 |
| Beam Angle           | 120°  |


## Features

- Edge-lit technology, no glare or dark spots, instant-on
- This 5/8" thick luminaire is easy to install on standard J-boxes with a quick snap
- Construction: plastic with white translucent acrylic lens
- Dimming: TRIAC Dimming 10% - 100%
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours
- Pre-select 5 CCT 2700K, 3000K, 3500K, 4000K, 5000K



| PACKAGE       |                 |
|---------------|-----------------|
| Weight.(g)    | 330g            |
| Qty/CTN (pcs) | 20pcs/CTN       |
| Box Dimension | 433*180.5*430mm |
| Gross Weight  | 7.8kg/CTN       |

## DIMENSIONS

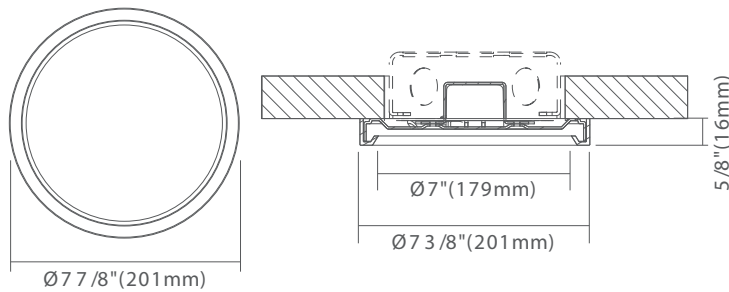

## INCLUDED IN BOX

- 6" LED Flush Mount, Round
- Mounting bracket to J-Box
- Two J-box Screws
- Three Wire Nuts

## Accessories (sold separately)

## Installation

### 4" J -Box

Accessories included:  
Attach mounting bracket to J-box  
Click downlight into mounting bracket

Mounting Bracket

J-Box Screws

Wire Nuts

### 4" & 6" Housing

Accessories sold separately  
Connect E26 adapter to the LED adapter  
Insert mounting clips and push downlight up until flush with ceiling

E26 Adapter

""/>

Mounting Clips for 6"/>"

Screw

LED Adapter

