
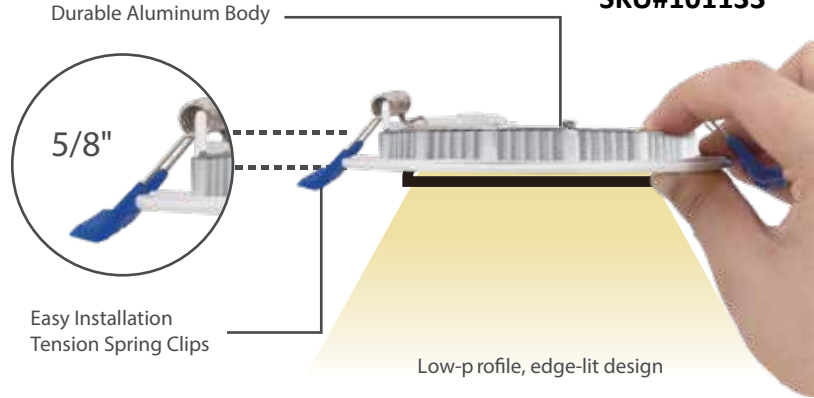


Pre-Select 5 CCT 6" Slim LED Light Panel

FDLED-6-R12W-5CCT
SKU#101132

FDLED-6-R15W-5CCT
SKU#101133

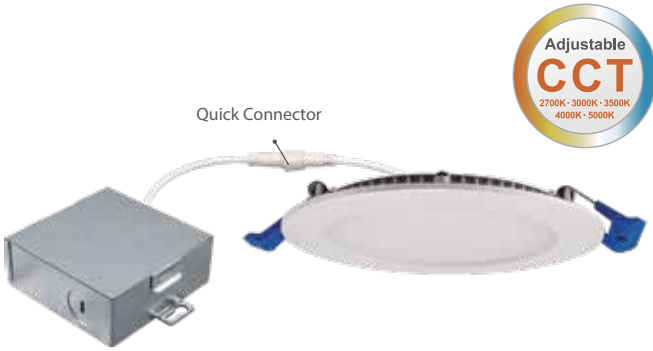


Features

- Edge-lit technology, no glare or dark spots, instant-on
- No existing recessed housing or junction box required
- Dimming: TRIAC 10% - 100%
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours



DIMENSIONS

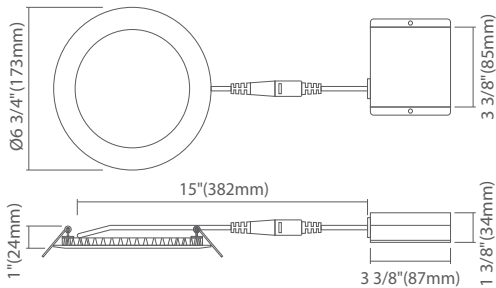

INSTALLATION



SPECIFICATIONS		
Model	FDLED-6-R12W-5CCT	FDLED-6-R15W-5CCT
Watts	12W	15W
Light Output(lm)	1030lm	1220lm
Size	6in	
Default Driver Input	AC120V,60HZ	
Color Temperature(K)	5CCT Selectable	
CRI	80Ra	
Dimming	Triac Dimming	
Power Factor	>0.9	
Approved Location	Wet Location	
Air Tight	Yes	
Operating Temp.	(-4°F~104°F) -20~40°C	
Beam Angle	120	

PACKAGE	
Weight.(g)	366g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	555*375*190mm
Gross Weight	8.78kg/CTN

Accessories

Extension Cables

4ft flexible connector, for use with Gimbal/ slim LED fixtures

6ft flexible connector, for use with Gimbal/ slim LED fixtures

10ft flexible connector, for use with Gimbal/ slim LED fixtures

20ft flexible connector, for use with Gimbal/ slim LED fixtures

Mounting Plates

3 1/4" x 6" new construction pre-mounting plate opening Ø3" (75mm), Ø4-3/8" (110mm), Ø6-1/4" (160mm)

6" new construction pre-mounting plate Ø6-1/4" (159mm)

6" new construction pre-mounting plate Ø6-1/4" (159mm)

Decorative Trim Ring

6 inch Round

Black (BK) Rubber Oil Bronze (BZ) Brushed Nickel (BN) Copper (CP)