



DESCRIPTION

The Vapor Tight Led Luminaire is a robust IP65 rated fixture and is a true alternative to fluorescent. This fixture has a PC/UV unbreakable lens and PC housing suitable for all wet locations.

SPECIFICATION FEATURES

Construction

Polycarbonate UV stabilized housing with opal lens. The lens attaches to the fixture with 8 polycarbonate chips. Stainless steel chips are available as an option.

Electrical:

Long Life LED System complete with Electrical driver to deliver the optimal performance. LED's available in 5000k and 4000K with typical CRI: 90. Ambient temperatures -40C to 40C. Regular rated 94,000 hours at 85C. Electronic drivers available in 120M and 347 Volt.

Driver Access:

Drivers can be accessed by snapping out the module plate

Finish:

PC Grey

Diffusion:

Lens is a high grade polycarbonate lens that is UV stabilized

Mounting:

Fixture comes with 2 stainless steel mounting brackets that facilitate quick and easy mounting direct to wall of ceiling.

Compliance:

cULus and DLC4.0 Qualified

Warranty:

5 years




LED VAPOR TIGHT

ORDERING CODE, ENERGY AND PERFORMANCE DATA

Model No.	Delivered LM	Input Watts	Voltage	Color Temp.	Efficacy Lm/W	Certification
FDVT-54LED	6396	54	120M	5000K	118	cULus/DLC
	6204	54	347V	5000K	114	cULus/DLC
	6106	54	120M	4000K	113	cULus/DLC
	6143	54	347V	4000K	113	cULus/DLC
FDVT-40LED	4557	39	120M	5000K	117	cULus/DLC
	4508	40	347V	5000K	113	cULus/DLC
	4390	39	120M	4000K	112	cULus/DLC
	4440	40	347V	4000K	112	cULus/DLC

SingleLamp

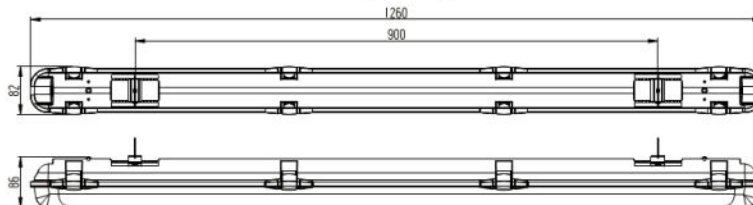

Double Lamp

