

LED Mini Wall Pack

Pre-Select 3 Wattage & 3 CCT


Features

- Die-Casting Aluminum: Good heat dissipation for long lifespan
- Built-in Photocell
- LM80 LEDs
- Lifespan: 50,000 hours
- UV Resistance Cover: no discoloration
- High Efficacy: > 130 lm/W




Pre-Select 3 CCT
3000K-4000K-5000K

Pre-Select 3 Wattage
13-18-26 watts

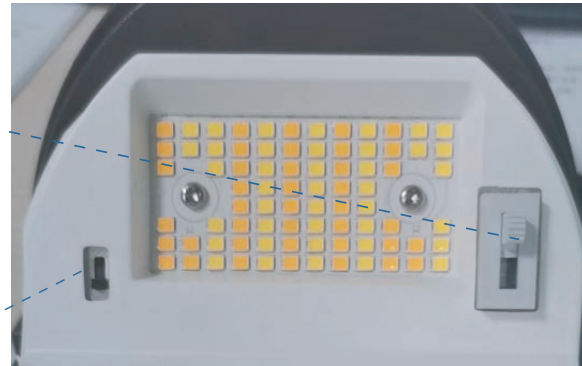

Dimensions

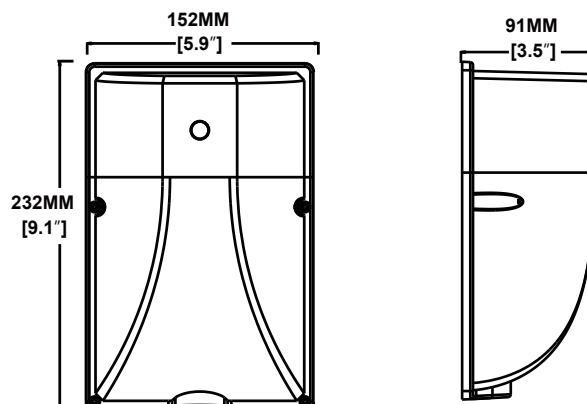



FDWPS-26-LED-5K-120-277V

SKU#104001

LED Mini Wall Pack Pre-Select 3 Wattage & 3 CCT

Specifications

Item No.									
3 Wattage Switchable(W)	26W			18W			13W		
Lumens Output (LM)	3000K 3401LM	4000K 3751LM	5000K 3486LM	3000K 2378LM	4000K 2621LM	5000K 2436LM	3000K 1762LM	4000K 1943LM	5000K 1806LM
Efficacy	>130 lm/W								
3 CCT Switchable(K)	3000K-4000K-5000K Selectable								
CRI	>70								
Lifespan	50,000 hours								
IP Rating	IP65								
Beam Angle	110 Degree								
Input Voltage	120-277V								
Power Factor	>0.9								
Housing	Die-Casting Aluminum								
Lens	Clear PC								
Surge Protection	6KV								
Certification	DLC 5.1 PREMIUM, ETL								
Operating Temperature	-40° ~ 131° F (-40° ~ 55° C)								
Warranty	5 years								