

FDL LED Linear High Bay



2FT: 110W, 162W, 223W

Product Description

FDL LED Linear High Bay series offers leading-edge efficacy and scalability for high ceiling application such as warehouse, distribution centers, manufacturing facilities and big box retailers.

Choose from chain and pendant mounting options to create a custom solution that meets any lighting requirement.

Features

- Ambient temperature -40° C to 40°C
- Suitable for damp locations
- L70 lifetimes projected to be 100,000 hours
- 120-347 Volt
- 0-10V Dimming standard
- 5 years limited warranty
- Surface mountable
- Post Painted White
- 22 Gauge Galvanized Steel
- Frosted Lens or optional Clear Lens


Model Selection

Rated Power	Model No.	Lumen	Efficiency (lms/watt)	Comparable Light Source	CCT	Description	CRI(Ra)
110W	FDHB2-R110-5K-120-347-D	15701	142	125W MH, 4-lamp T8, 2-lamp T5HO	5000K	Rated Voltage 120-347V, 0-10V Dimming	≥80
110W	FDHB2-R110-4K-120-347-D	15311	139	125W MH, 4-lamp T8, 2-lamp T5HO	4000K		
162W	FDHB2-R162-5K-120-347-D	23522	161	400W MH, 6-lamp T8, 4-lamps T5HO	5000K		
162W	FDHB2-R162-4K-120-347-D	21785	134	400W MH, 6-lamp T8, 4-lamps T5HO	4000K		
223W	FDHB2-R223-5K-120-347-D	32332	145	750W MH, 6-lamp T5HO	5000K		
223W	FDHB2-R223-4K-120-347-D	31611	141	750W MH, 6-lamp T5HO	4000K		



DLC 5.1 Premium Certified

Dimensions

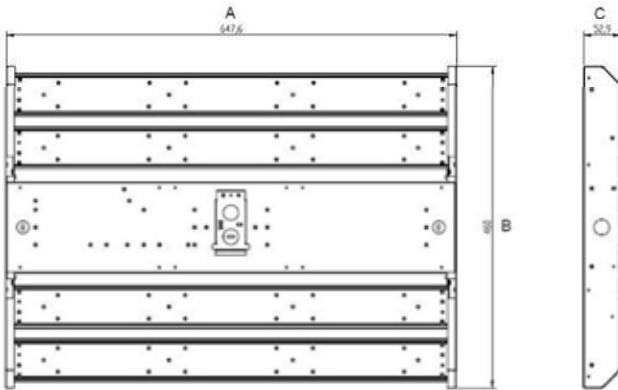

Dimensions		
Model No.	Rated Power	Size(inch)
FDHB2-R110	110W	L25.6"*W14.96"*H2.09"
FDHB2-R162	162W	L25.6"*W18.11"*H2.09"
FDHB2-R223	223W	L25.6"*W18.11"*H2.09"

Package Information

Package Information				
Model No.	Rated Power	Carton Size (inch)	Weight (Kgs)	Weight (Lbs)
FDHB2-R110	110W	L27.3"*W16.30"*H2.8"	5.65	12.45
FDHB2-R162	162W	L27.3"*W19.4"*H2.8"	7.05	15.54
FDHB2-R223	223W	L27.3"*W19.4"*H2.8"	8.00	17.64