

8" LED Flush Mount, Round



SPECIFICATIONS	
Model	FDFM-18W-LED-5CCT-120V-D
Energy Star Unique ID	3701825
Watts	18W
CRI	CRI90+
Color Temperature(K)	5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K
Lumen Output (lm)	1500lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Operating Temp.	(- 4°F~104°F) -20~40°C
Beam Angle	120°


Features

- Edge-lit technology, no glare or dark spots, instant-on
- This 5/8" thick luminaire is easy to install on standard J-boxes with mounting bracket
- Construction: plastic with white translucent acrylic lens
- Dimming: TRIAC down to 10%
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours
- Field selectable 2700K, 3000K, 3500K, 4000K, 5000K



PACKAGE	
Weight.(g)	480g
Qty/CTN (pcs)	20pcs/CTN
Box Dimension	495*450*180.5mm
Gross Weight	10.8kg/CTN

DIMENSIONS

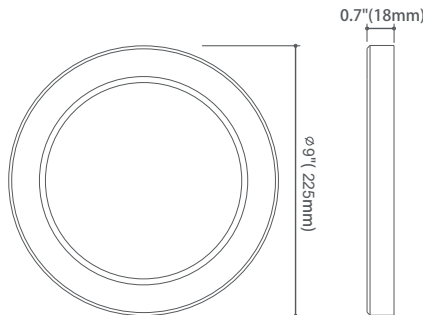

INCLUDED IN BOX

- 8" LED Flush Mount Round
- Mounting bracket to J-Box
- Two J-box Screws
- Three Wire Nuts
- E26 adapter
- Mounting clips for 6"/7"/9"
- Screws for mounting clip
- LED adapter

Installation

5" & 6" J-Box

Accessories included:
Attach mounting bracket to J-box
Click downlight into mounting bracket

5" & 6" Housing

Accessories included:
Connect E26 adapter to the LED adapter
Insert mounting clips and push downlight up until flush with ceiling