
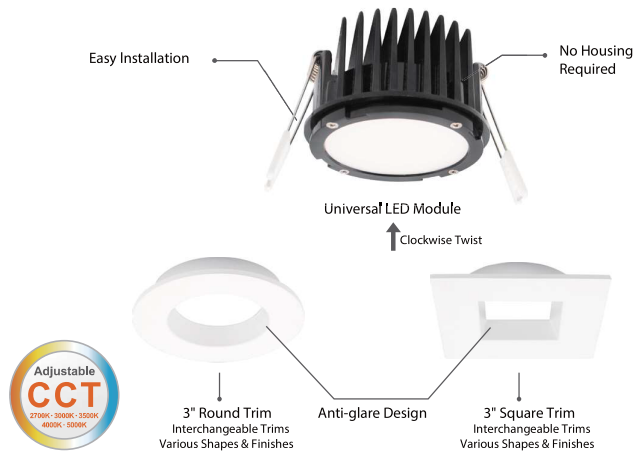


# 3" Regressed Module Downlight

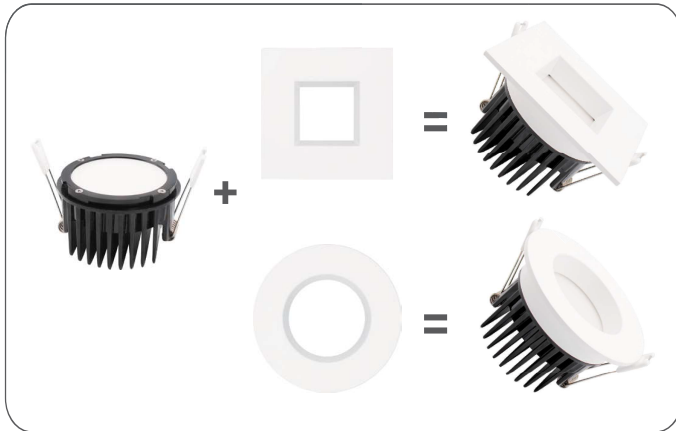

## Trim Finish Options

- BLACK
- WHITE

## Description


3" Regressed Module Downlight

## Features

- \* Interchangeable Trims
- \* Available shapes: Round and Square
- \* Type IC, Air-Tight & Suitable for Wet Location - No Housing Required
- \* Fast Installation & No Junction Box Needed
- \* Includes two spring loaded clips to attach to any ceiling material.
- \* 10%~100% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- \* Rated for long life - over 50,000 hours




## DIMENSIONS

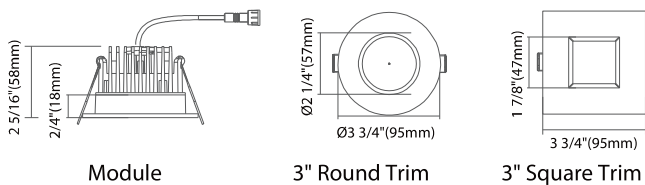

SPECIFICATIONS	
Model	FDRS-3-10W-5CCT-120V-R
Energy Star Unique ID	3943495
Watts	10W
CRI	CRI90
Color Temperature(K)	Pre-Select 5CCT 2700K/3000K/3500K/4000K/5000K
Lumen Output (lm)	820lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming 10-100%
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
IC Rated	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	90°

PACKAGE	
Weight(g)	440g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	L345xW300xH305mm
Gross Weight	9.42kg/CTN

## INSTALLATION

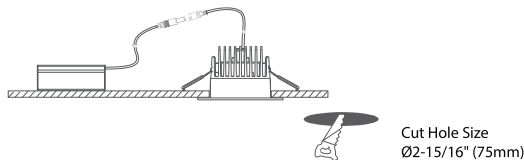

## INCLUDED IN BOX

- 3" Regressed Module Downlight and Remote Driver



## OPTIONAL ACCESSORIES



## Mounting Plate



## Flexible Connector



## Emergency Power Pack

