

# 4" Recessed Downlight



## Trim Finish Options

- BLACK • WHITE

## Description


4" Recessed Downlight, Round

## Features


- \* IC Rated, Air-Tight & Wet Location - No Housing Required
- \* Fast Installation & No Junction Box Needed
- \* Includes two spring loaded clips to attach to any ceiling material.
- \* 10%-100% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- \* Rated for long life - over 50,000 hours



## DIMENSIONS

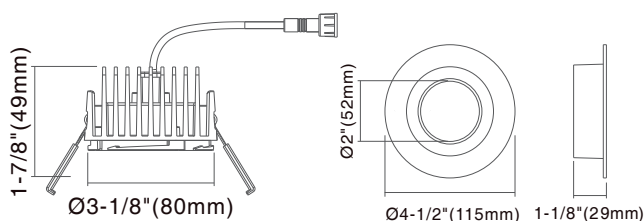


## INSTALLATION



Cut Hole Size  
Ø3-3/4" (95mm)

## OPTIONAL ACCESSORIES

### Mounting Plates



**FD-UNMP (SKU#101078)**  
Universal Mounting Plate,  
compatible with 2", 3", 3.5", 4"  
Light Panel and Downlights

### Extension Cables



10ft flexible connector,  
for use with Gimbal/  
Recessed/slim LED fixtures



20ft flexible connector,  
for use with Gimbal/  
Recessed/slim LED fixtures

SPECIFICATIONS	
Model	FDRD-4-12W-5CCT-120V-WH-R   FDRD-4-12W-5CCT-120V-BK-R
Energy Star Unique ID	3891879
Watts	12W
CRI	CRI90+
Color Temperature(K)	Pre-Select 5 CCT 2700K /3000K/3500K/4000K /5000K
Lumen Output (lm)	984lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming 10-100%
Power Factor	>0.9
Wet Location	Yes
Air Tight / IC Rated	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	90°

PACKAGE	
Qty/CTN (pcs)	18pcs/CTN

## INCLUDED IN BOX

- 4" Recessed Downlight, and Remote Driver

