


4" Recessed Gimbal Downlight Round




Features


- * Durable Aluminum body with adjustable gimbal
- * Fast and easy snap-in installation
- * Tilting gimbal light source for directional lighting
- * IC rated for direct contact with insulation
- * No housing required
- * Input Voltage: AC 120V 60Hz
- * 10-100% dimming capability this fixture is compatible with industry standard TRIAC/ELV dimmers
- * Lifespan- over 50,000 hours
- * Suitable for WET LOCATION

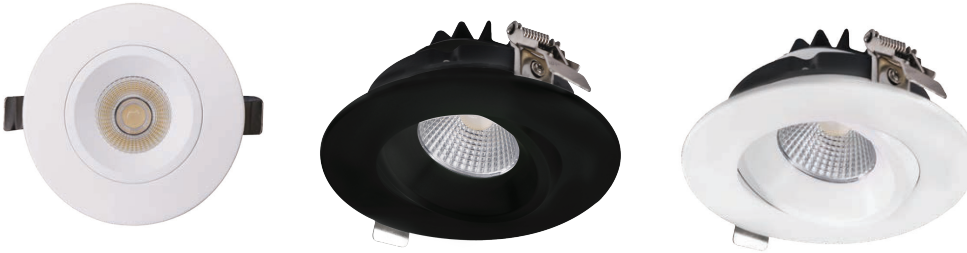


DIMENSION

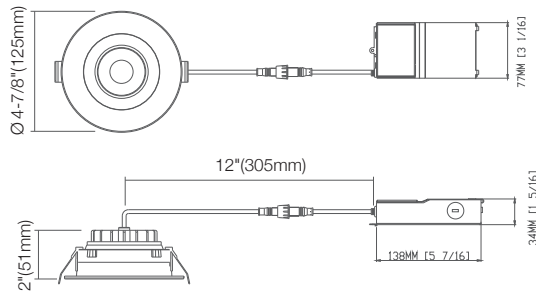

INSTALLATION

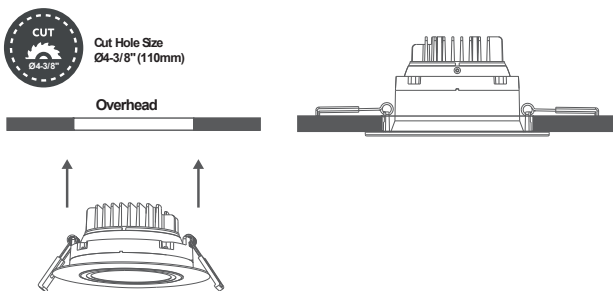

OPTIONAL ACCESSORIES

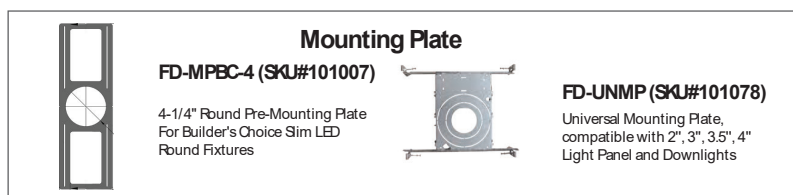

SPECIFICATIONS	
Model	FDRGD-4-12W-5CCT-120V-WH-R / FDRGD-4-12W-5CCT-120V-BK-R
Energy Star Unique ID	3798833
Watts	12W
CRI	CRI90+
Color Temperature(K)	Pre-Select 5 CCT 2700K/3000K/3500K/4000K/5000K
Lumen Output (lm)	984lm
Default Driver Input	AC120V,60Hz
Dimming	Triac Dimming 10-100%
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
IC Rated	Yes
Operating Temp	(-4°F~ 104°F) -20~40°C
Beam Angle	38°

PACKAGE	
Weight.(g)	610g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	L420*W340*H355mm
Gross Weight	13.7kg/CTN

INCLUDED IN BOX

4" Recessed Gimbal Downlight, Round

