



Pre-Select 5 CCT 6" Slim LED Light Panel

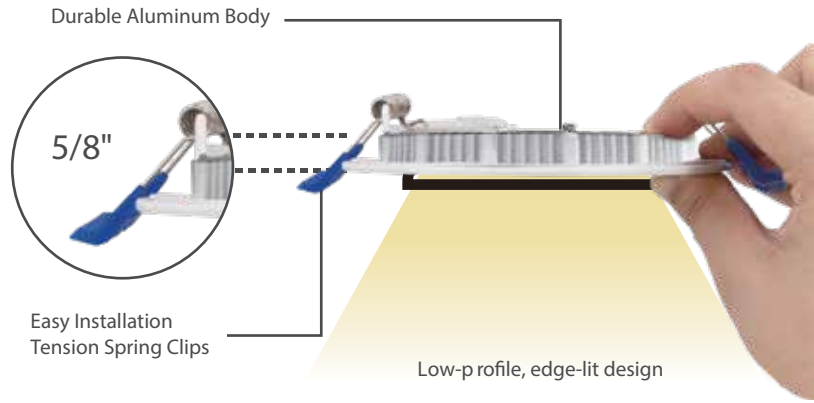


Features

- Edge-lit technology, no glare or dark spots, instant-on
- No existing recessed housing or junction box required
- Dimming: TRIAC 10% - 100%
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours

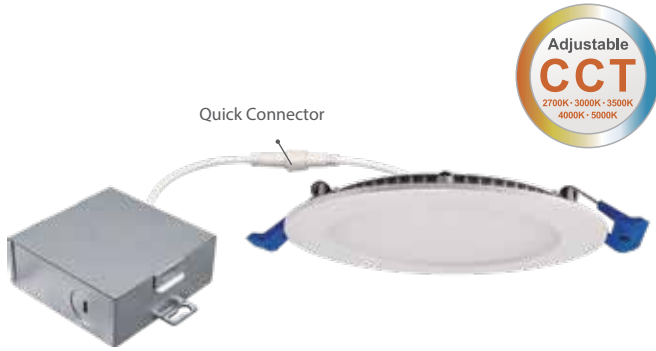

DIMENSIONS

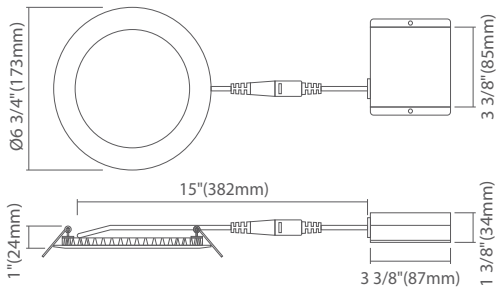

INSTALLATION




SPECIFICATIONS	
Model	FDLED-6-R12W-5CCT
Watts	12W
Light Output(lm)	1030lm
Size	6in
Default Driver Input	AC120V,60HZ
Color Temperature(K)	5CCT Selectable
CRI	80Ra
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	120


PACKAGE	
Weight.(g)	366g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	555*375*190mm
Gross Weight	8.78kg/CTN

Accessories

Extension Cables

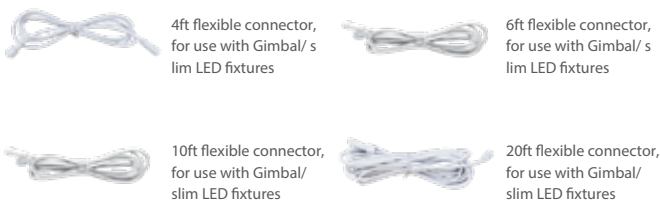

Mounting Plates

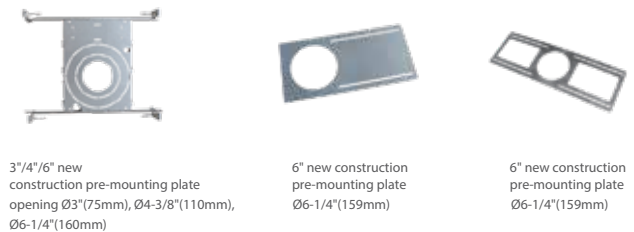

Decorative Trim Ring



6 inch Round