

# FDL ULTRA Thin "Plus" LED Light Panel Series

## 6" LED Recessed Downlight



**2 HOUR FIRE RATING**  
Tested to comply with UL 263,  
ASTM E119 & CAN ULC S101



### FEATURES

- 2-Hour fire rating
- Providing a reinforced and heat resistant steel casing
- Selectable color temperature: 2700K, 3000K, 3500K, 4000K & 5000K
- Junction box with commercial grade driver included
- Triac Dimmable, Certified airtight, IC rated
- Easy installation - NO ADDITIONAL BOX REQUIRED
- 5year warranty
- Tested to comply with UL263, ASTM E119 & CAN ULC S101




2 HOUR FIRE RATING  
Tested to comply with UL 263,  
ASTM E119 & CAN ULC S101

### DIMENSION

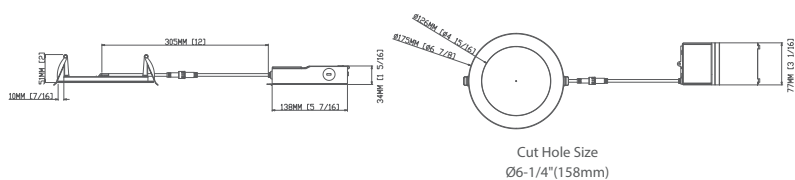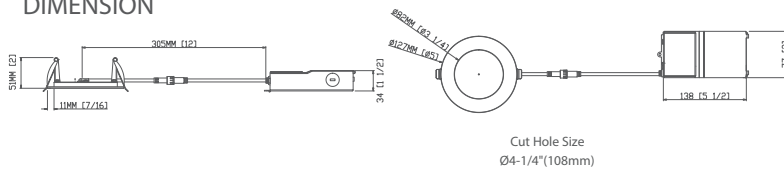

### INSTALLATION

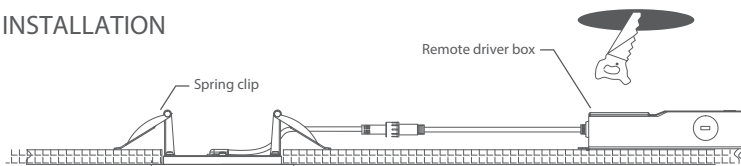

### Accessories

#### Extension Cables



10ft Flexible connector,  
for use with Gimbal/  
slim LED fixtures



20ft Flexible connector,  
for use with Gimbal/  
slim LED fixtures

#### Mounting Plate



SKU#101007 is a 4" new construction  
pre-mounting plate  
Opening Ø4 1/4" (108mm)

#### Decorative Trim Ring



Black (BK) Rubber Oil Bronze (BZ) Brushed Nickel (BN) Copper (CP)  
4 inch round

#### Goof Ring



4" Goof Ring  
Inside Diameter - 4 3/16"  
Outside Diameter - 5 3/4"  
Thickness - 1mm  
for use with Gimbal / Slim LED fixtures