

FDL LED Floating "Plus" Series 4" LED Floating Gimbal



Clip Height
1 1/4 inch



2 HOUR FIRE RATING
Tested to comply with UL 263,
ASTM E119 & CAN ULC S101



Description

4" LED Fire Rated Floating Gimbal
Adjustable in any direction and easy to use

Features


- * Ideal for sloped ceilings, wall washing, highlighting artwork, task or general lighting
- * Adjustable Steel Gimbal with 90° tilt angle
- * Type IC, Air-Tight & Damp - No Housing Required
- * 1 3/8" Deep - Fits in 1" ceiling space
- * Driver Inside Connection Box - No Junction Box Needed
- * Rated for long life - over 50,000 hours
- * 2-Hour fire rating



2 HOUR FIRE RATING
Tested to comply with UL 263,
ASTM E119 & CAN ULC S101


SPECIFICATIONS	
Model	FDFG-FR-4-9W-5CCT-WH / FDFG-FR-4-9W-5CCT-BK
Energy Star Unique ID	3891079
Watts	9W
CRI	>90
Output Lumen (lm)	738lm
Color Temperature(K)	5CCT Selectable
Default Driver Input	AC120V, 60Hz
Optional Driver Input	Triac Dimmers 10% - 100%
Power Factor	>0.9
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Operating Temp.	(-4°F to +104°F) -20 to +40°C
Beam Angle	38°

DIMENSIONS

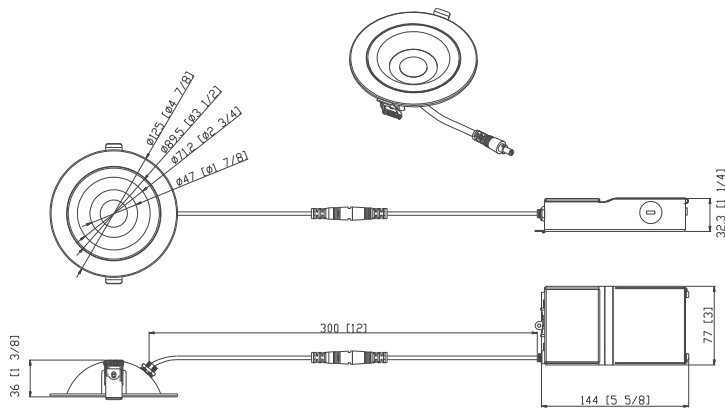

INSTALLATION

Cut Hole Size
Ø4-1/4"(108mm)

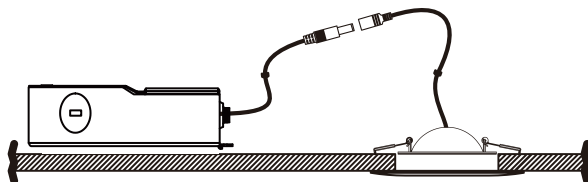

INCLUDED IN BOX

- 4" LED Fire Rated Round Floating Gimbal with Remote Driver



OPTIONAL ACCESSORIES

Mounting Plates



SKU#101007 is a 4" new construction pre-mounting plate
Opening Ø4 1/4"(108mm)