

FDL ULTRA Thin "Plus" LED Light Panel Series

3" LED Recessed Downlight



2 HOUR FIRE RATING
Tested to comply with UL 263,
ASTM E119 & CAN ULC S101

Clip Height
1 3/8 inch


FEATURES

- 2-Hour fire rating, providing a reinforced and heat resistant steel casing
- Selectable color temperature: 2700K, 3000K, 3500K, 4000K & 5000K
- Junction box with commercial grade driver included
- Triac Dimmable, Certified airtight, IC rated
- Easy installation - NO ADDITIONAL BOX REQUIRED
- 5year warranty
- Tested to comply with UL263, ASTM E119 & CAN ULC S101




2 HOUR FIRE RATING
Tested to comply with UL 263,
ASTM E119 & CAN ULC S101

DIMENSION

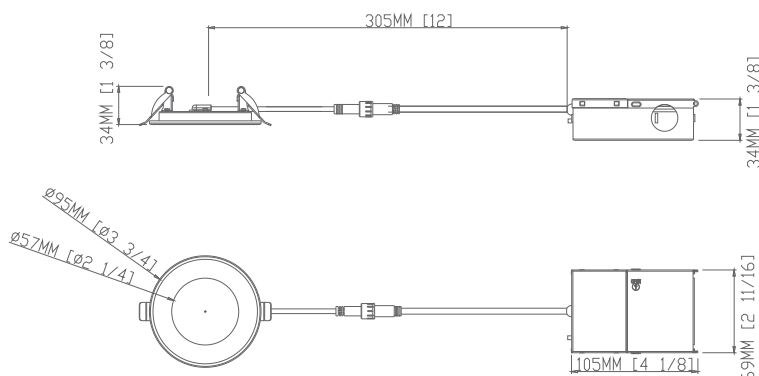

INSTALLATION

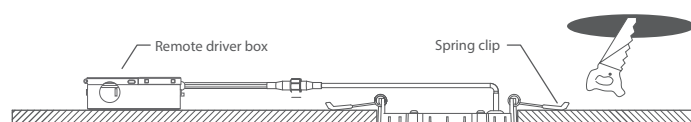

Cut Hole Size
Ø3-1/4" (82mm)

SPECIFICATIONS	
Model	FDLED-FR-3-8W-5CCT-120V
Energy Star Unique ID	3891878
Watts	8W
Lumen Output (lm)	656lm
Size	3in
Default Driver Input	AC120V,60HZ
Color Temperature(K)	5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K
CRI	CRI90+
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Airtight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	120°

PACKAGE	
Weight.(g)	300g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	345*235*250mm
Gross Weight	6.5kg/CTN

Optional Accessories

Extension Cables



10ft flexible connector,
for use with Gimbal/ slim LED fixtures



20ft flexible connector,
for use with Gimbal/ slim LED fixtures