

# FDL ULTRA Thin "Plus" LED Light Panel Series 6" LED Recessed Downlight



**2 HOUR FIRE RATING**  
Tested to comply with UL 263,  
ASTM E119 & CAN ULC S101


## FEATURES

- 2-Hour fire rating
- Providing a reinforced and heat resistant steel casing
- Selectable color temperature: 2700K, 3000K, 3500K, 4000K & 5000K
- Junction box with commercial grade driver included
- Triac Dimmable, Certified airtight, IC rated
- Easy installation - NO ADDITIONAL BOX REQUIRED
- 5year warranty
- Tested to comply with UL263, ASTM E119 & CAN ULC S101




2 HOUR FIRE RATING  
Tested to comply with UL 263,  
ASTM E119 & CAN ULC S101

## DIMENSION

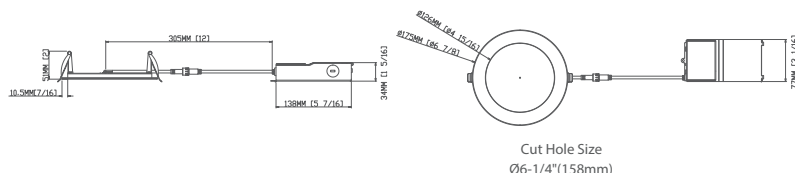

## INSTALLATION

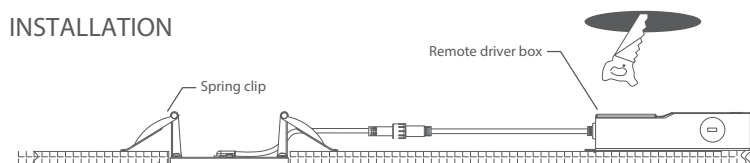

## SPECIFICATIONS

Model	FDLED-FR-6-15W-5CCT-120V
Energy Star Unique ID	3627150
Watts	15W
Lumen Output (lm)	1230lm
Size	6in
Default Driver Input	AC120V,60HZ
Color Temperature(K)	5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K
CRI	CRI90+
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Airtight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	120 °

## Accessories

### Extension Cables



10ft Flexible connector,  
for use with Gimbal/  
slim LED fixtures



20ft Flexible connector,  
for use with Gimbal/  
slim LED fixtures

### Mounting Plate



SKU#101007 is a 4" new construction  
pre-mounting plate  
Opening Ø4 1/4" (108mm)

### Decorative Trim Ring



4 inch round

Black (BK) Rubber Oil Bronze (BZ) Brushed Nickel (BN) Copper (CP)

### Goof Ring



4" Goof Ring  
Inside Diameter - 4 3/16"  
Outside Diameter - 5 3/4"  
Thickness - 1mm  
for use with Gimbal / Slim LED fixtures