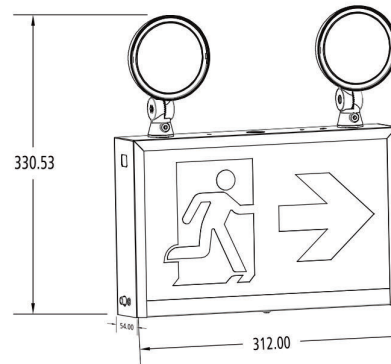# LED Running Man Exit Sign, Metal Case

The Metal Case Running Man Exit Sign is suitable for property management and institutional applications, and is designed using durable metal materials.
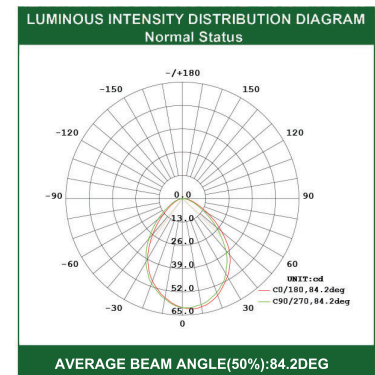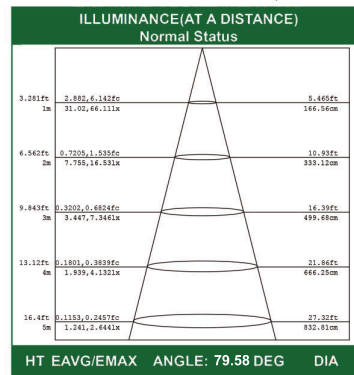
C UL US
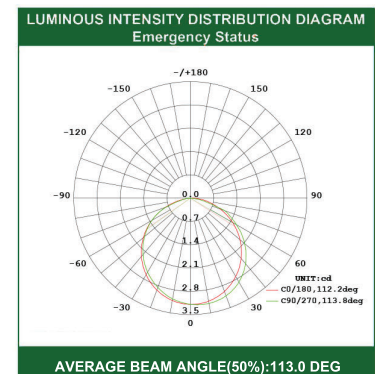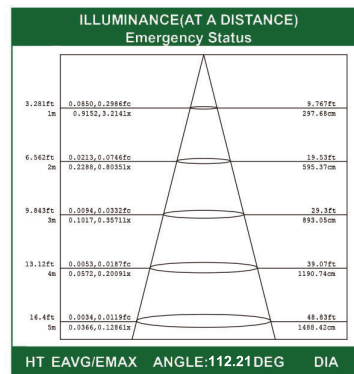LISTED

Dimension:

330.53

54.00

312.00

Unit:mm

Features and Specifications:

- Powder coated Steel Frame
- Super bright & Long Lasting LEDs
- High impact UV stabilized flame rated thermoplaitsc housing (UL94 V-0)
- 120V/347V AC input
- Nickel Cadmium (NiCad) battery
- Test switch and AC-On indicator included
- Universal Mounting:Wall,Ceiling and Flag Mounting
- Single or double face with changeable Legends
- Combo heads adjustable
- Canopy included
- 90 Mins. battery backup time
- Over-charge and Over-discharge protection

ILLUMINANCE(AT A DISTANCE)
Normal Status

3.281ft 1m	2.882,6.142fc 31.02,66.11lx	5.465ft 166.56cm
6.562ft 2m	0.7205,1.535fc 7.755,16.53lx	10.93ft 333.12cm
9.843ft 3m	0.3202,0.6824fc 3.447,7.346lx	16.39ft 499.68cm
13.12ft 4m	0.1801,0.3839fc 1.939,4.132lx	21.86ft 666.25cm
16.4ft 5m	0.1153,0.2457fc 1.241,2.644lx	27.32ft 832.81cm

HT EAVG/EMAX   ANGLE: 79.58 DEG   DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM
Normal Status

UNIT:cd
C0/180,84.2deg
C90/270,84.2deg

AVERAGE BEAM ANGLE(50%):84.2DEG

Comes standard with three pictogram legends for direction selection

ILLUMINANCE(AT A DISTANCE)
Emergency Status

3.281ft 1m	0.0850,0.2986fc 0.9152,3.214lx	9.767ft 297.68cm
6.562ft 2m	0.0213,0.0746fc 0.2288,0.80351x	19.53ft 595.37cm
9.843ft 3m	0.0094,0.0332fc 0.1017,0.35711x	29.3ft 893.05cm
13.12ft 4m	0.0053,0.0187fc 0.0572,0.20091x	39.07ft 1190.74cm
16.4ft 5m	0.0034,0.0119fc 0.0366,0.12861x	48.83ft 1688.42cm

HT EAVG/EMAX   ANGLE:112.21DEG   DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM
Emergency Status

UNIT:cd
C0/180,112.2deg
C90/270,113.8deg

AVERAGE BEAM ANGLE(50%):113.0 DEG