

Pre-Select 5 CCT 2" Trimless LED Downlight, Square



SPECIFICATIONS	
Model	FDTL-LED-2-15W-5CCT-WH-SQ
Watts	15W
CRI	80Ra+
Color Temperature(K)	Pre-Select 5 CCT 2700K/3000K/3500K/4000K/5000K
Light Output(lm)	1000lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming 10% - 100%
Power Factor	>0.99
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

Description

2" Trimless LED Downlight, 15watts, Square

Features

- * Durable airtight aluminum body
- * Type IC, Air-Tight & Wet - No Housing Required
- * Flangeless installation, provide a more high end looking
- * No housing required, easy and fast installation
- * 10%-100% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- * Includes two spring loaded clips to attached to any ceiling material.
- * Rated for long life - over 50,000 hours


PACKAGE	
Weight.(g)	562g
Qty/CTN (pcs)	18 pcs/CTN
Box Dimension	405(L) x 295(W) x 490(H) mm
Gross Weight	12.65 kg/CTN




INCLUDED IN BOX

- 2" 15W Square LED Trimless Downlight with Driver
- 4 Screws

DIMENSIONS

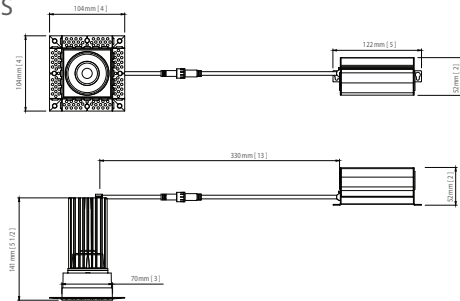

INSTALLATION

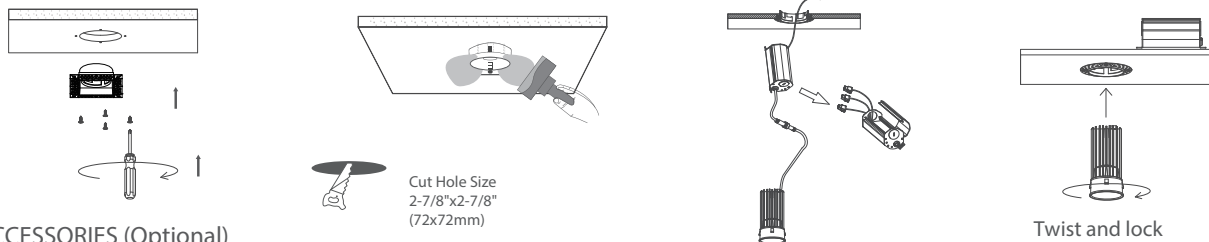

ACCESSORIES (Optional)

Flexible Connector

