


# 4" Slim LED Light Panel, SQUARE

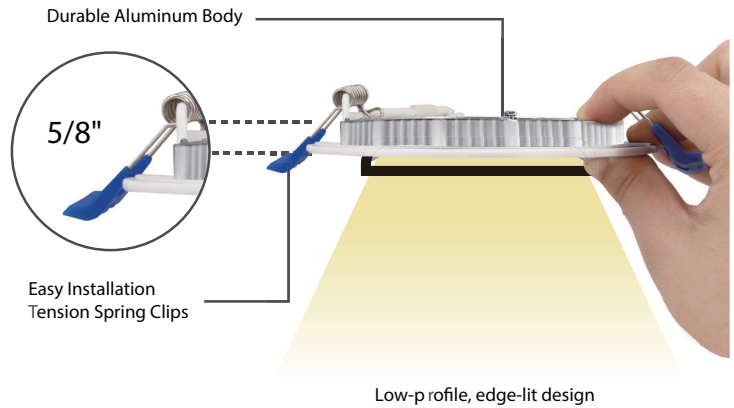


Low-p profile, edge-lit design

## Features


- Edge-lit technology, no glare or dark spots, instant-on
- No existing recessed housing or junction box required
- Dimming TRIAC 10% to 100%
- I.C. rated for direct contact with insulation
- Suitable for DAMP LOCATION
- Rated for a long life - over 50,000 hours
- Pre-Select 5 CCT - 2700K, 3000K, 3500K, 4000K, 5000K



## DIMENSIONS

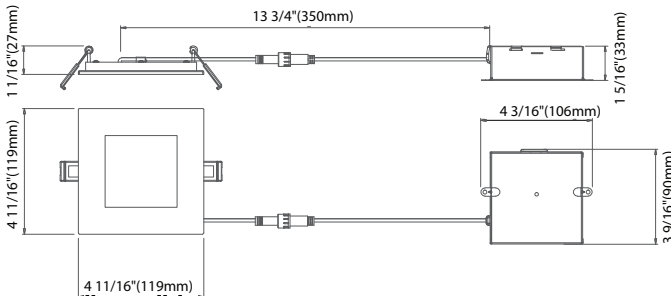

## INSTALLATION

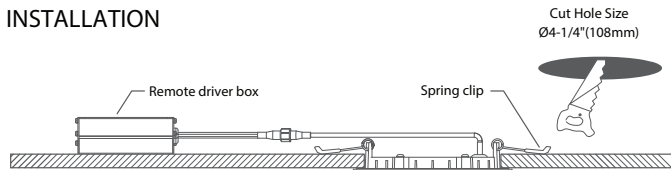

## Accessories (Optional)

<h3>Extension Cables</h3> <ul style="list-style-type: none"> <li>4ft flexible connector, for use with Gimbal/slim LED fixtures</li> <li>6ft flexible connector, for use with Gimbal/slim LED fixtures</li> <li>10ft flexible connector, for use with Gimbal/slim LED fixtures</li> <li>20ft flexible connector, for use with Gimbal/slim LED fixtures</li> </ul>	<h3>Mounting Plate</h3> <ul style="list-style-type: none"> <li>4" new construction pre-mounting plate with collar for use with screw down "C" style remodel housings. Opening Ø4 3/8" (110mm)</li> <li>4" new construction pre-mounting plate. Opening Ø4 1/4" (108mm)</li> <li>FD-UNMP. The MP-UNV-346 is a 3"4"/6" new construction pre-mounting plate opening Ø3" (75mm), Ø4-3/8" (110mm), Ø6-1/4" (160mm)</li> </ul>	<h3>4 Inch Trim</h3> <ul style="list-style-type: none"> <li>Square Brushed Nickel</li> <li>Square Black</li> </ul>
--	--	--

SPECIFICATIONS	
Model	FDLED-4-R12W-5CCT-SQ
Watts	12W
Light Output(lm)	700lm
Size	4-inch
Default Driver Input	AC120V,60HZ
Color Temperature(K)	Pre-Select 5CCT - 2700K, 3000K, 3500K, 4000K, 5000K
CRI	80Ra
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	DAMP Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	120°
PACKAGE	
Weight.(g)	405g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	465*275*250 mm
Gross Weight	8kg/CTN