



7" Smart Ceiling Light RGB and Tunable White

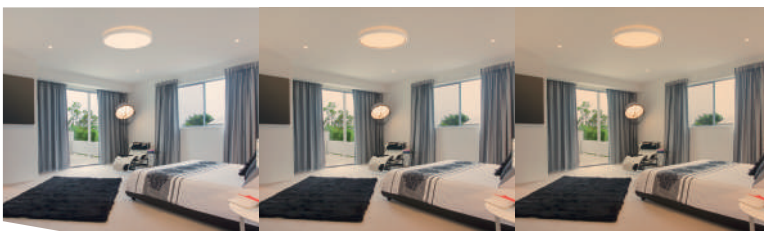

RGB-Tunable White (2700-6500K)


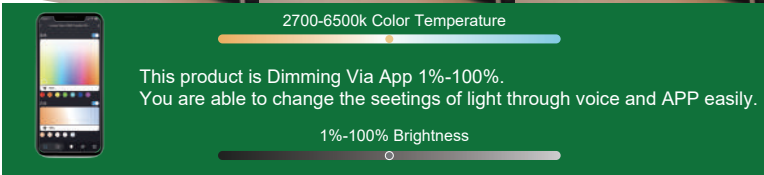


Features

- Thin profile that perfectly in low plenum applications
- RGB and Tunable White
- Wi-Fi enabled, Tuya module
- Suitable for wet locations
- Ideal for residential and light commercial spaces



DIMENSIONS

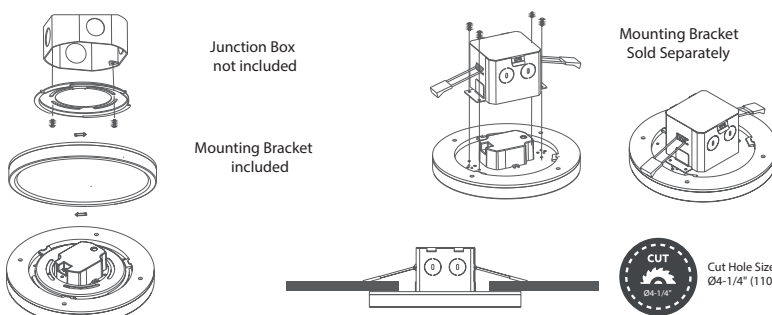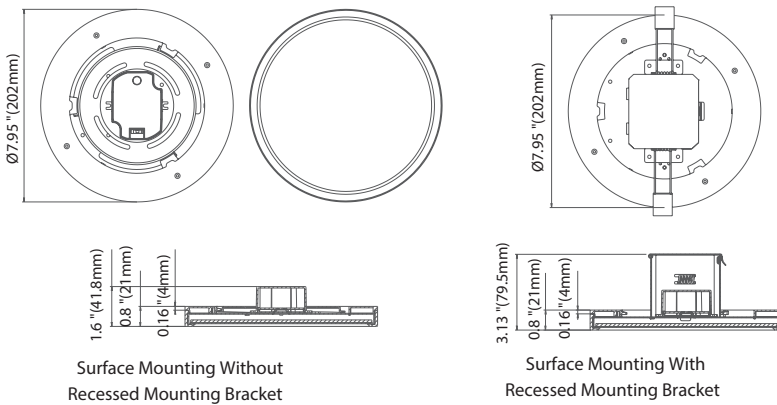

SPECIFICATIONS	
Model	FDRGB-7-15W-WH-SMART
(RGB/CW)	2.5W/15W
Light Output/CW	1100lm
Light Output/RGB	80lm
CRI	80 Ra+
Color Temperature(K)	RGB + tunable white (2700-6500K)
Default Driver Input	120-277V, 50/60Hz
Dimming	Dimmable Via APP 1-100%
Power Factor	>0.9
Approved Location	Wet Location
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	110°

PACKAGE	
Weight.(g)	422g
Qty/CTN (pcs)	20pcs/CTN
Box Dimension	L430*W270*H435mm
Gross Weight	9.94kg/CTN

INCLUDED IN BOX

- 7" Smart Ceiling Light RGB and Tunable White
- One Mounting Bracket
- Two Mounting Screws for Mounting Bracket
- Three Wire Connectors

