


LED Emergency Remote Light, 1-Head




The single led remote head is constructed of high impact thermoplastic. A tool-less mechanically adjustable swivel locks the head in position once adjusted.

Dimension

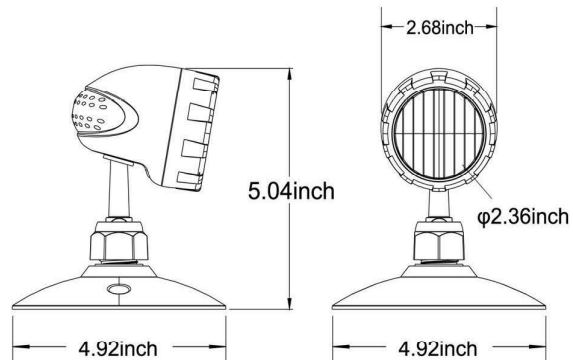


Features and Specifications:

- > Injection-molded thermoplastic ABS housing
- > UL-94V-0 flame rating, fire-retardant
- > Wall and ceiling mounting
- > Universal voltage LED remote compatible with any emergency lighting system (3.6-24VDC)
- > Super bright SMD LED 2W 130lm
- > Suitable for damp locations
- > cULus listed

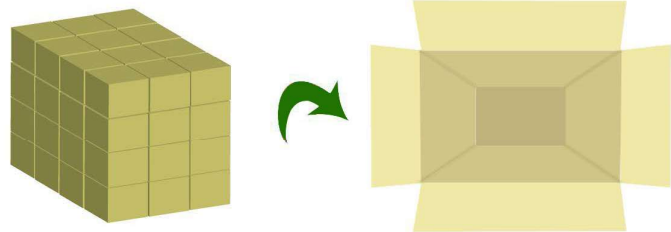


**Shipping Carton
48pcs each**

Illuminance (at a distance)

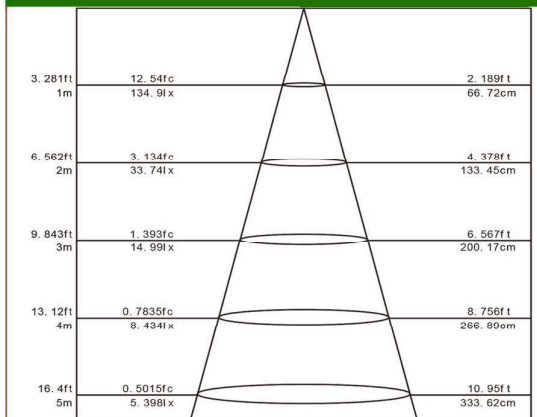

HT EAVG/EMAX ANGLE:36.90DEG DIA

Luminous Intensity Distribution Diagram

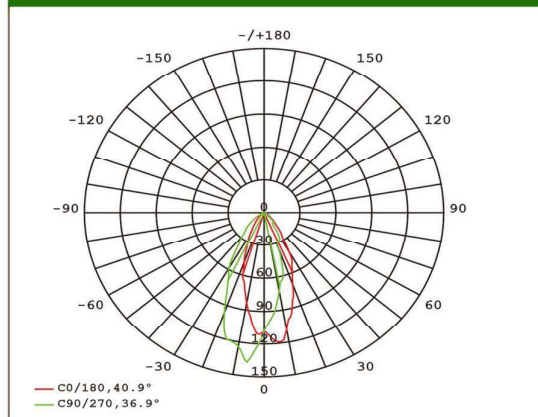

AVERAGE BEAM ANGLE(50%):38.9 DEG